

# TRAILERABLE COVER KIT



P/N 2880632; 2890329; 2890330

## MISSING OR DAMAGED PARTS


Before beginning assembly, inspect the kit and its component(s) to be sure all parts and tools are accounted for and not damaged. If missing parts or parts are damaged, please contact your Selling Dealer for assistance.

If your accessory was purchased online, please contact POLARIS® customer service at **1-800-POLARIS** (US & Canada only).

## APPLICATION

Verify accessory fitment at [www.polaris.com](http://www.polaris.com).

## KIT CONTENTS

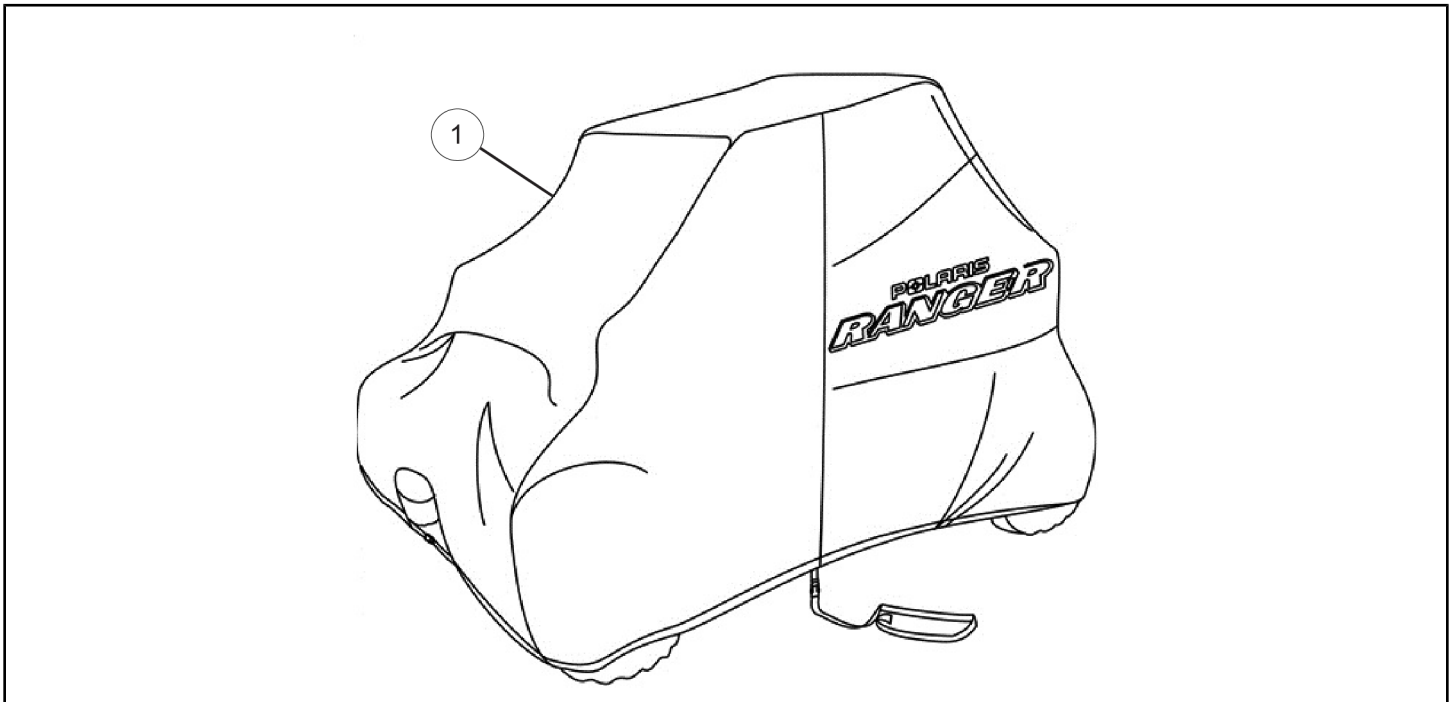

REF	QTY	PART DESCRIPTION	P/N AVAILABLE SEPARATELY
1	1	Trailerable Cover	n/a

## TOOLS REQUIRED

None

## IMPORTANT

Your Trailerable Cover Kit is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

## INSTALLATION INSTRUCTIONS

### VEHICLE PREPARATION

#### GENERAL

1. Park vehicle on a flat surface.

2. Shift vehicle into PARK.

3. Turn key to OFF position and remove key.

## ACCESSORY INSTALLATION


1. Attach ratchet (A) to inside of cover using hook and loop fastener.

### IMPORTANT


If ratchet is loose it may damage vehicle during cover installation.



2. Put cover on vehicle. Make sure end of cover with ratchet is positioned at rear of vehicle.
3. Connect buckle (B) at front of vehicle.

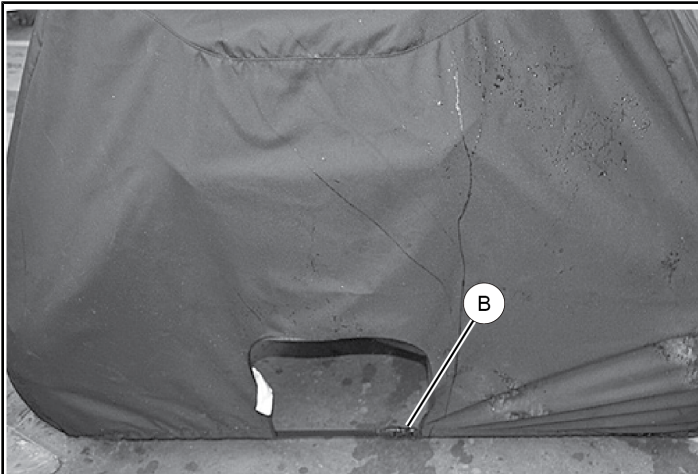


4. Route strap through loop (D) at rear of vehicle. Route end of strap (C) through ratchet (A) and pull until snug.

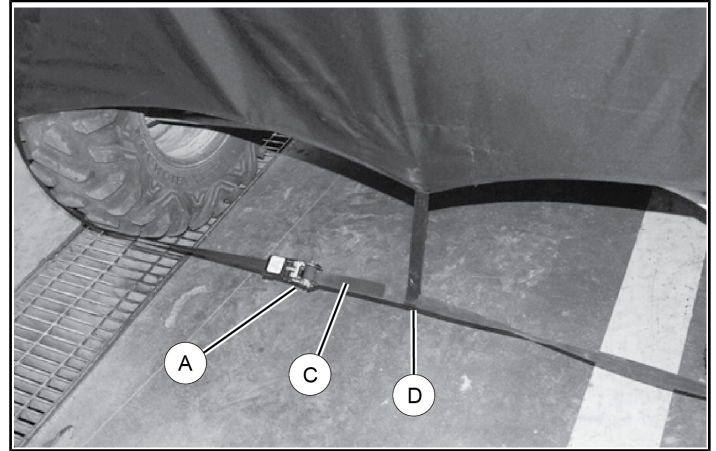

5. Pull cover down over vehicle as far as possible.



6. Tighten strap around vehicle using ratchet. Do not overtighten.
7. Route center strap under machine and attach using buckle (E). Pull end of strap to tighten cover.

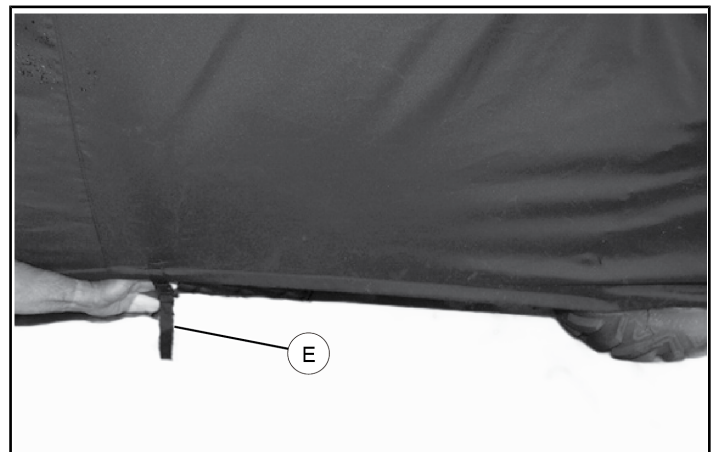

## **OPERATION**

- Make sure cover is tight before trailering vehicle. A loose cover may flap and cause damage to vehicle.
- Do not trailer covered vehicle in excess of speed limit.
- Make sure covered vehicle is always trailered facing forward. Cover is not designed to be used with vehicle facing rearward.