

# EXPANDABLE COVER KIT



**P/N 2883568**

## APPLICATION


Verify accessory fitment at [Polaris.com](http://Polaris.com).

## BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

## KIT CONTENTS

This Kit includes:

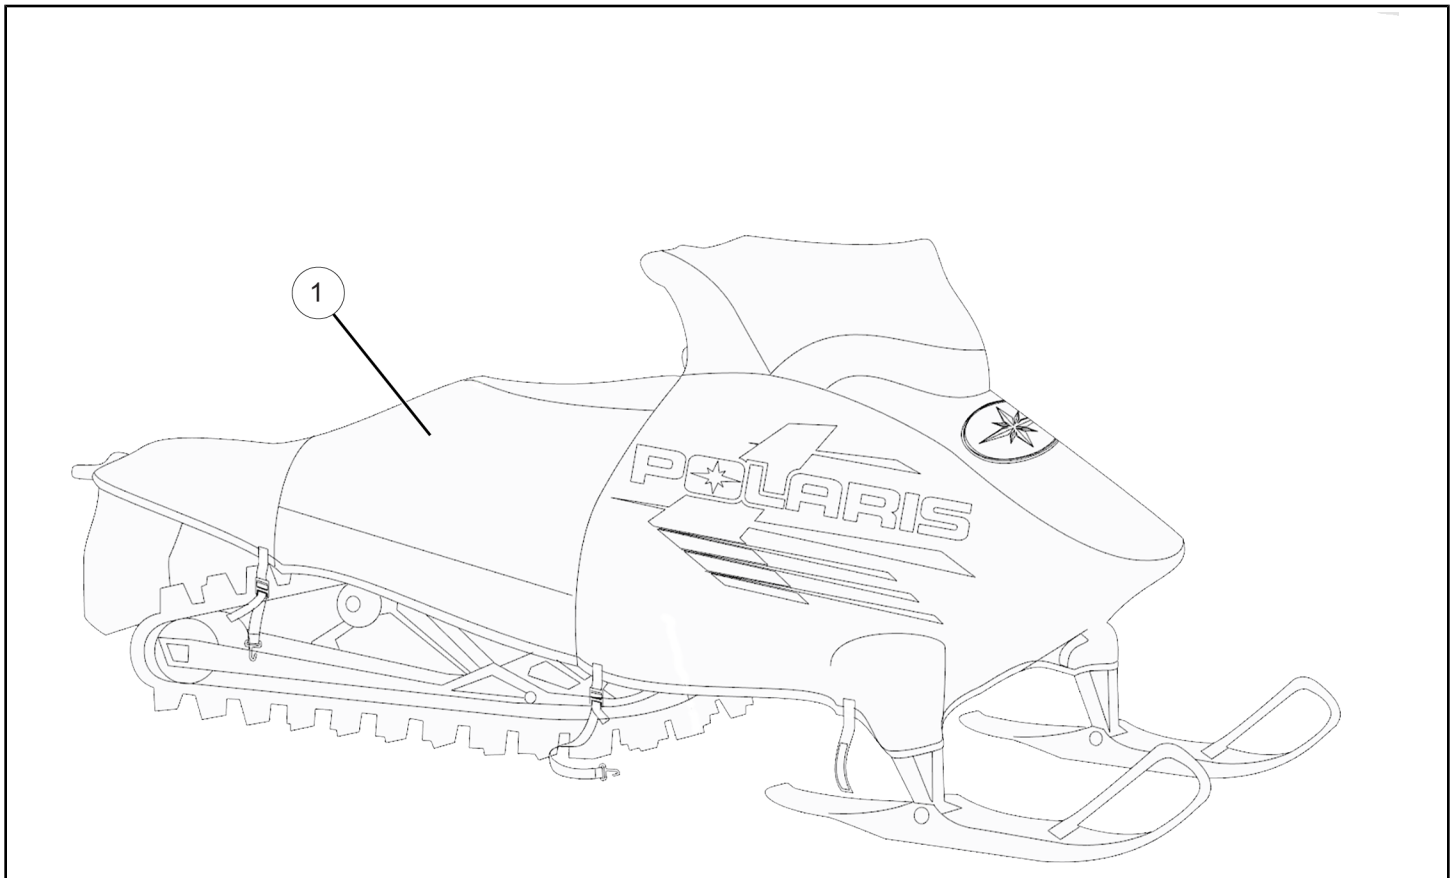

REF	QTY	PART DESCRIPTION	PART NUMBER
1	1	Expandable Cover	2688851
	1	Instructions	9928769

## TOOLS REQUIRED

- None

## CONSUMABLES REQUIRED

- None

## IMPORTANT


Your Expandable Cover Kit is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

## INSTALLATION INSTRUCTIONS


The Expandable Cover has a zippered section, (E) (highlighted for clarity), that can be opened and expanded to accommodate the Lock & Ride FT2 Passenger Seat (PN 2883637).

### ⚠ WARNING


If transporting the vehicle on a non-enclosed trailer you **MUST** ensure that the cover is properly secured to the vehicle. If the vehicle is not equipped with the accessory passenger seat you **MUST** ensure that the expandable section (E) and the fuel access port (G) (see photos below) are zipped closed to minimize the amount of extra material exposed. Failure to comply may allow airflow, vibration, or other factors to cause damage to the cover or vehicle and may cause the cover to separate from the vehicle causing an accident resulting in personal injury or death.

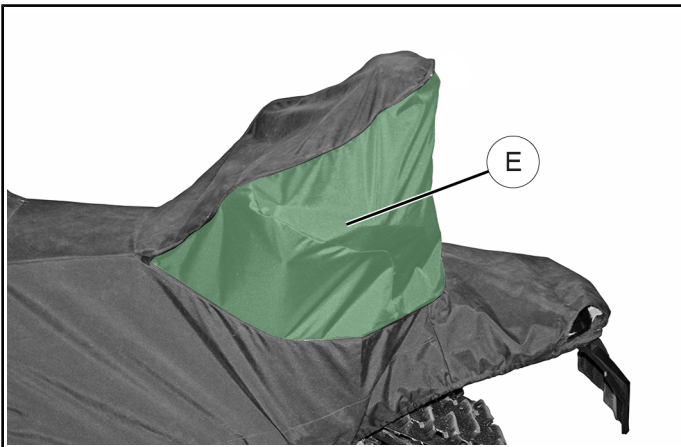

1. Before installing the cover onto the vehicle, secure the cover hold down hooks (F) into the sewn-in hook loops on the cover to prevent the hooks from damaging the vehicle while installing. See image below.

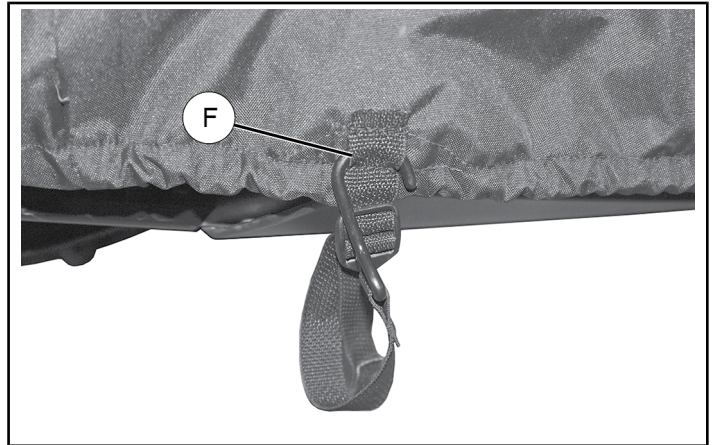

2. Place the cover over the windshield and handle bars (A).

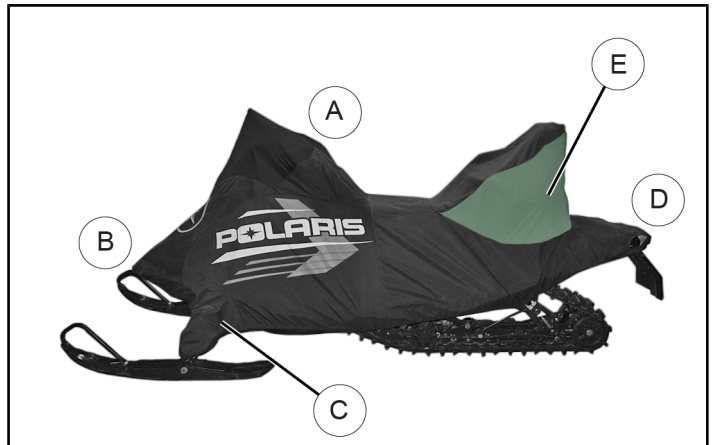


3. Next, place the cover over the front bumper (B) and spindles (C).
4. Stretch the cover over the rear of the vehicle (D).

### NOTE


If applicable, open the expandable section (E), per your vehicles requirements for proper fit on the vehicle.

5. Once the cover is fitted to the vehicle, secure the spindle straps (H), around the inside of the spindle on both sides of the vehicle as shown below.

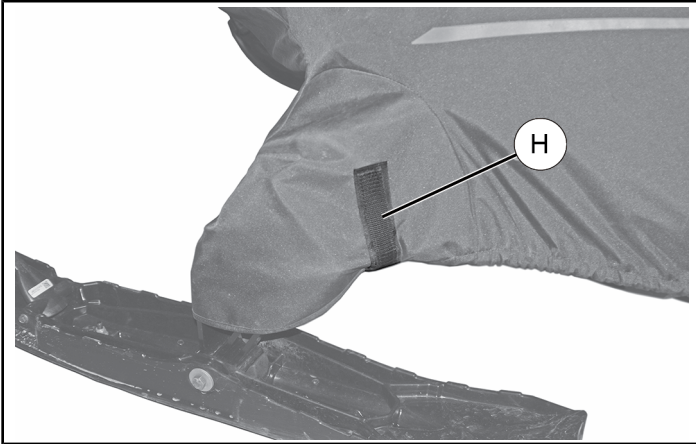

7. Check all straps to ensure proper tension and adjust as necessary.
8. Verify cover is secure and fuel access port (G) is fully zipped closed BEFORE transporting vehicle. If there is no passenger seat installed the expandable portion (E) MUST also be fully zipped close BEFORE transport.

6. Next, attach the four cover hold down hooks (F) to the vehicle. There are two hooks on each side, located in the approximate locations as shown below.

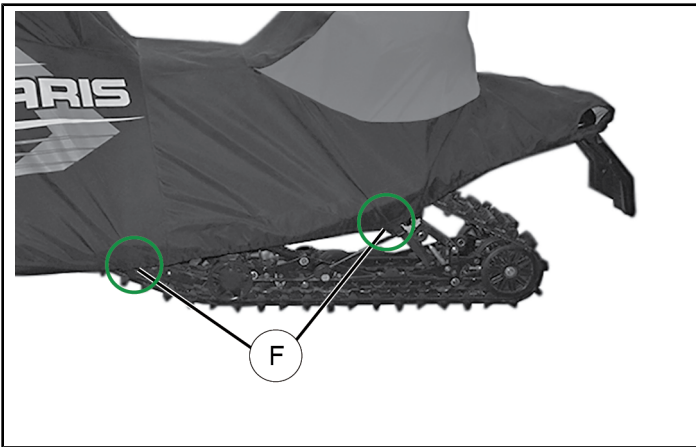

## FEEDBACK FORM

A feedback form has been created for the installer to provide any comments, questions or concerns about the installation instructions. The form is viewable on mobile devices by scanning the QR code or by clicking [HERE](#) if viewing on a PC.

### FEEDBACK FORM

