

TRAILERABLE COVER KIT



P/N 2879373, 2879949, 2883764, 2883989, 2884565, 2884566

APPLICATION

Verify accessory fitment at www.polaris.com.


BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

KIT CONTENTS

NOTICE

Trailerable Cover Kit, P/N 2883764 shown, others similar.

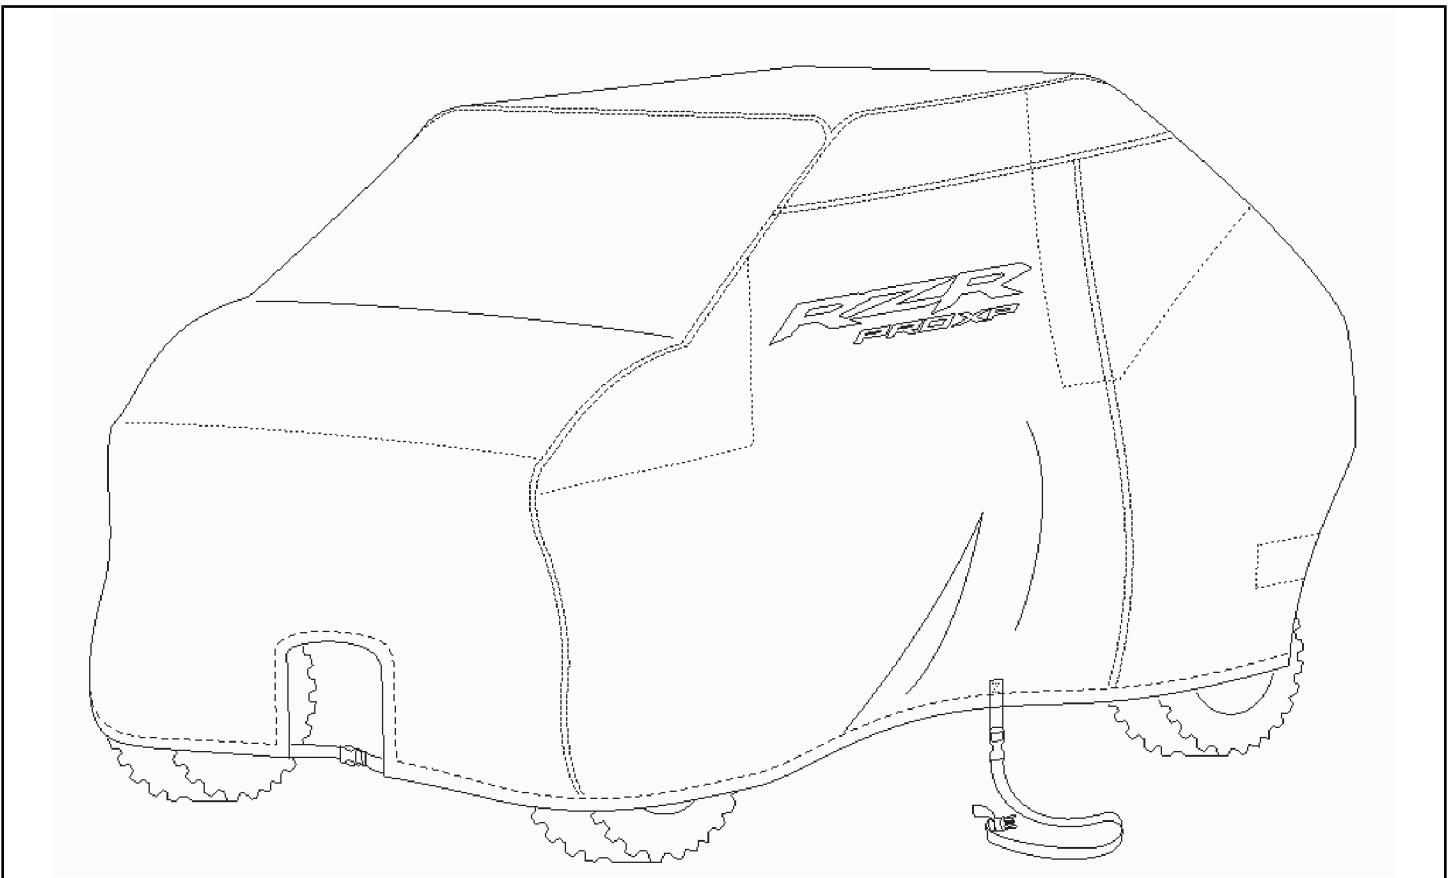

TOOLS REQUIRED

None

IMPORTANT

Your Trailerable Cover Kit is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

⚠ WARNING

If transporting vehicle in non-enclosed trailer then vehicle must FACE FORWARD, or cover must be removed.

Failure to comply may allow airflow, vibration, or other factors to separate cover from vehicle and cause an accident, resulting in serious personal injury or death.

IMPORTANT

If buffeting occurs during transport, stop vehicle and remove or adjust cover.

VEHICLE PREPARATION

GENERAL


1. Shift vehicle transmission into PARK. Turn key to OFF position and remove from vehicle.
2. Before cover installation:
 - Examine vehicle for any accessories that extend outside of ROPS or vehicle body to ensure proper fit of cover and prevent damage. Remove or stow accessories and/or install padding as necessary.
 - Ensure exterior of vehicle is clean. Transporting a dirty vehicle with cover installed may damage vehicle finish.

ACCESSORY INSTALLATION

1. If not already done, temporarily stow ratchet at left rear corner of cover by folding over and securing flaps with hook-and-loop strips.
2. Carefully drape cover over vehicle, pulling cover as far down over tires as possible.

IMPORTANT


Cover MUST be pulled down below lower surface of tires, and straps located BELOW lower tire lugs, to ensure cover stays in place during transport.

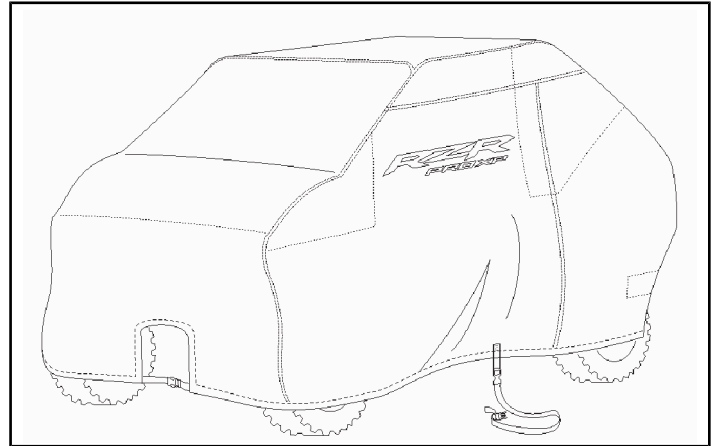


3. Secure front of cover by connecting buckles.

NOTICE


Left-hand strap is sewn to edge of cover opening; right-hand strap is free to slide in cover pocket. Cover opening accommodates accessory winch or plow installation (sold separately).

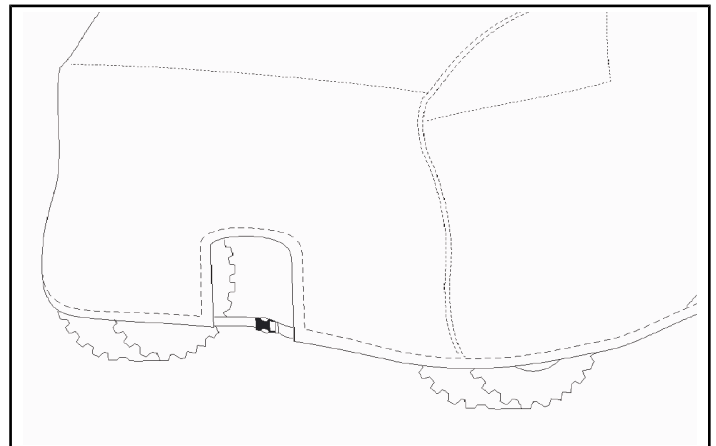


4. Thread strap through rear center loop. Insert strap into partially closed ratchet and begin to operate ratchet mechanism.

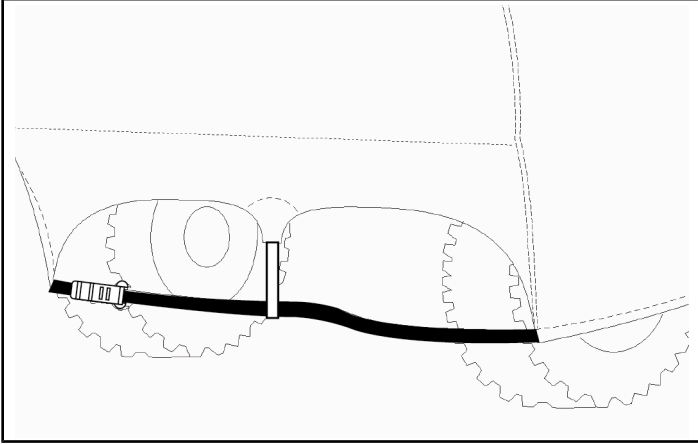

6. Buckle center strap to one side and route strap beneath vehicle. Buckle strap to opposite side and pull taut.

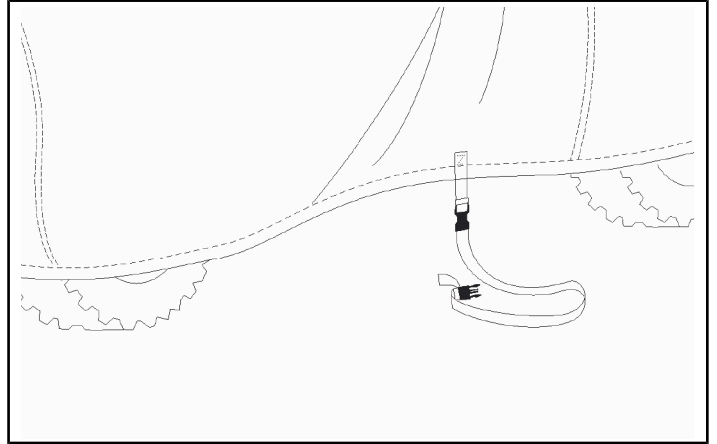

5. Ensure rear strap is positioned below lower rear tire lugs before strap is pulled taut by ratchet.

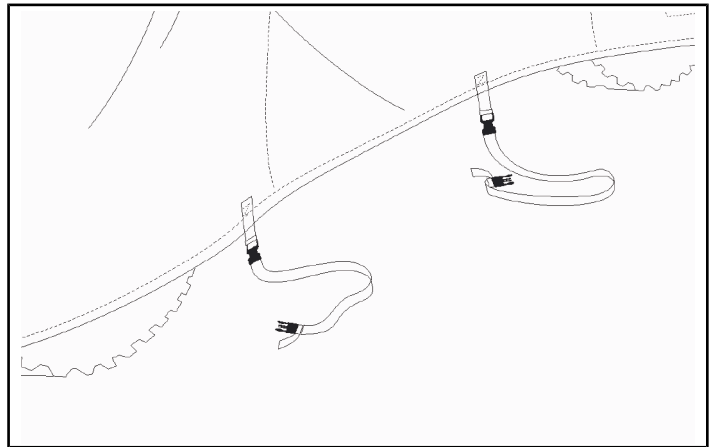

7. When removing cover, stow ratchet as described above.

FEEDBACK FORM

A feedback form has been created for the installer to provide any comments, questions or concerns about the installation instructions. The form is viewable on mobile devices by scanning the QR code or by clicking [HERE](#) if viewing on a PC.

