

REAR BUMPER KIT



P/N 2885087


BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

APPLICATION

Verify accessory fitment at www.polaris.com.

KIT CONTENTS

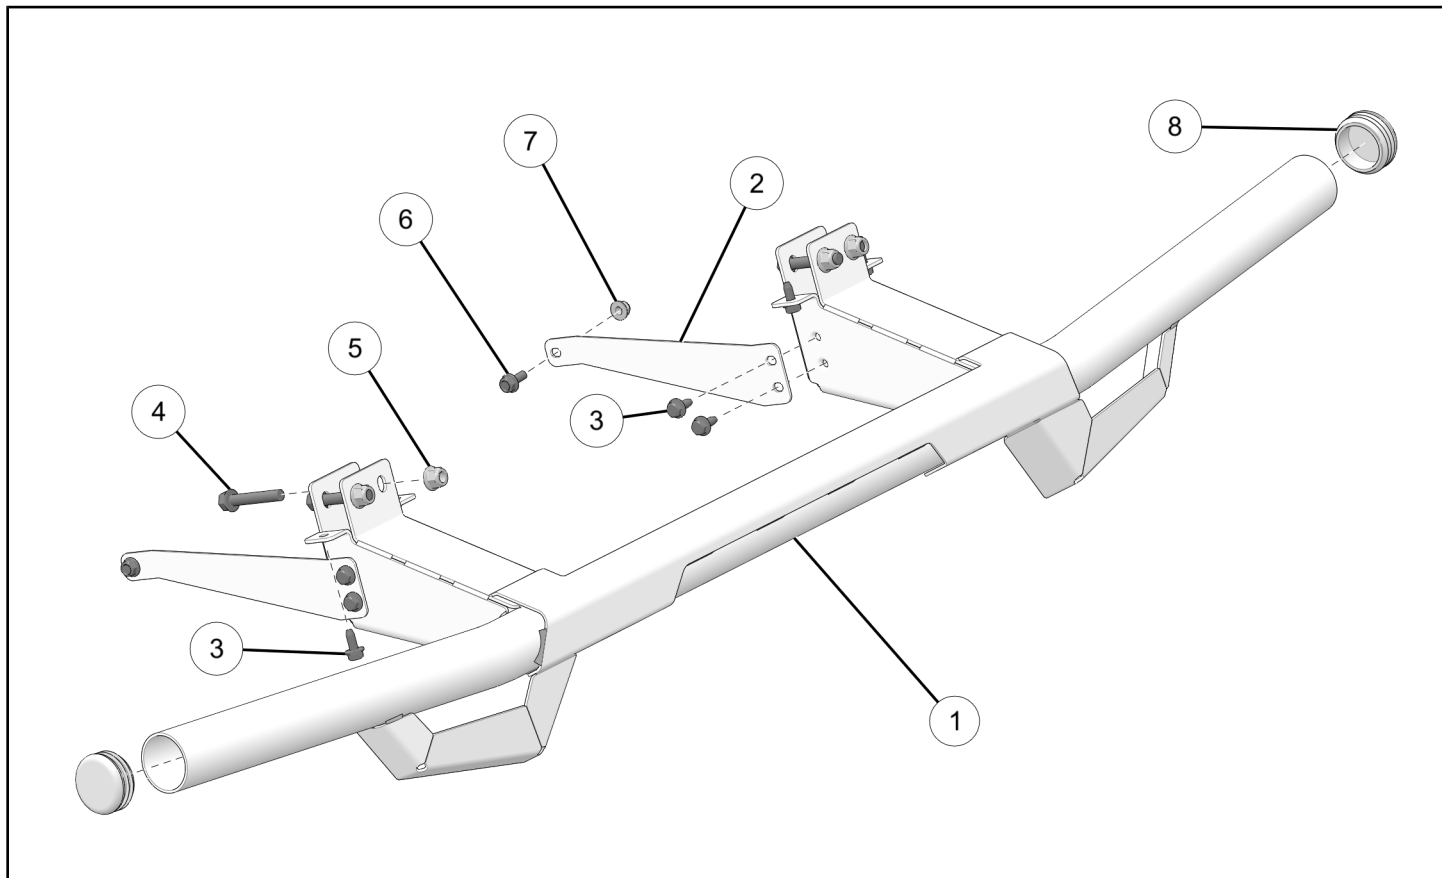

REF	QTY	PART DESCRIPTION	P/N AVAILABLE SEPARATELY
1	1	Weld – Bumper, Main, Rear	1026250
2	2	Bracket – Exterior Bumper, Rear	5272035
3	8	Screw – Hex Flange, M6 x 1.0 x 15 mm	7518513
4	4	Screw – Hex Flange, M8 x 1.25 x 45 mm	7516732
5	4	Nut, M8 x 1.25 mm	7547332
6	2	Screw – Hex Flange, M6 x 1.0 x 16 mm	7518591
7	2	Nut, M6 x 1.0 mm	7547339
8	2	Cap – Bumper	5434191

TOOLS REQUIRED

- Safety Glasses
- Socket Set, Metric
- Torque Wrench
- Wrench Set, Metric

IMPORTANT

Your Rear Bumper Kit is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS


VEHICLE PREPARATION

GENERAL

1. Park vehicle on a flat surface.
2. Shift vehicle into PARK.
3. Turn key to OFF position and remove key.


CARGO BOX ACCESS

1. Lift handle and fold tailgate down.

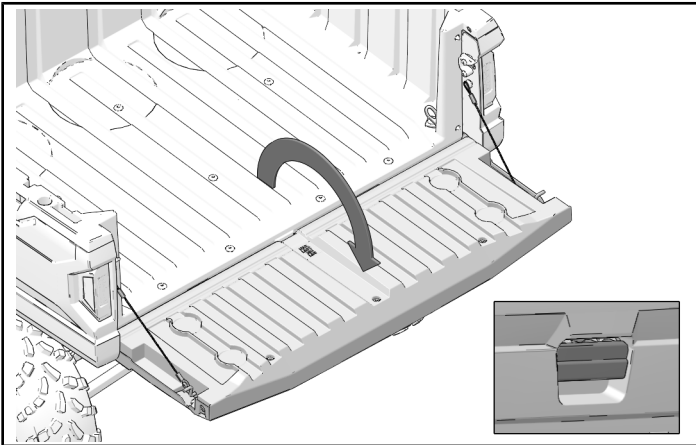


TAILGATE REMOVAL

1. Remove the cables from each side of the cargo box by lifting them off of each screw.

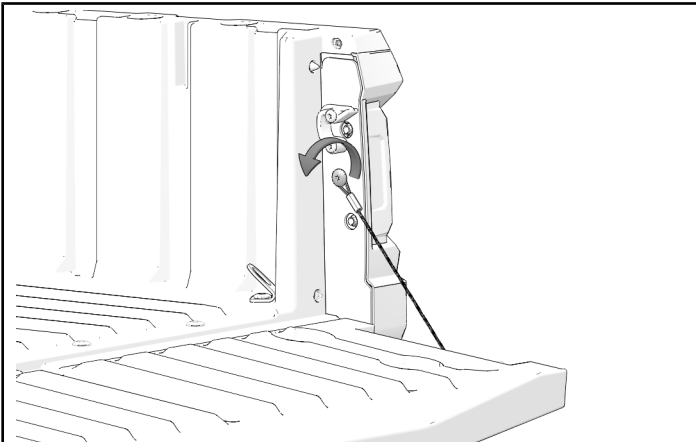


2. Tilt the tailgate downward.

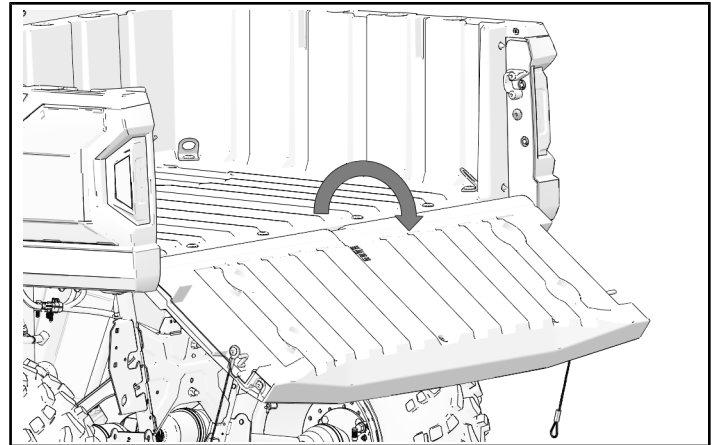

3. Pull left side of tailgate down, then move tailgate off of right side pivot on cargo box.

NOTICE

Left side pivot is slotted to allow tailgate to lift out.

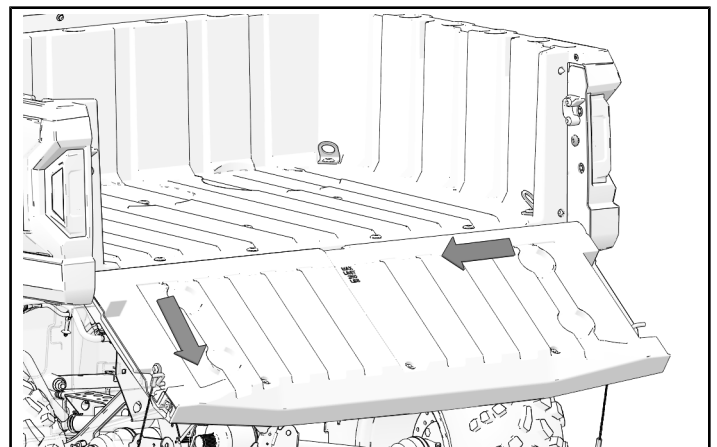


4. Set tailgate aside.

ACCESSORY INSTALLATION

BUMPER BRACKET INSTALLATION

1. Loosely install two bumper brackets ② to rear bumper ① with four screws ③.

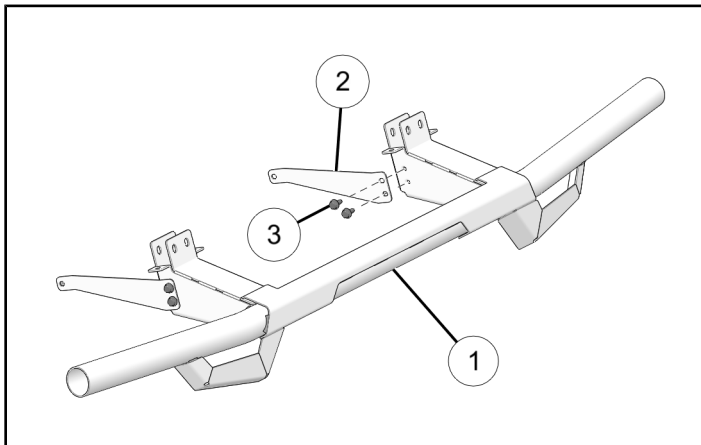


BUMPER INSTALLATION

IMPORTANT

Make sure tail light electrical harness does not become pinched during rear bumper installation.


1. Move rear bumper ① up onto chassis bar ①. Make sure holes on bumper line up with holes on chassis bar.

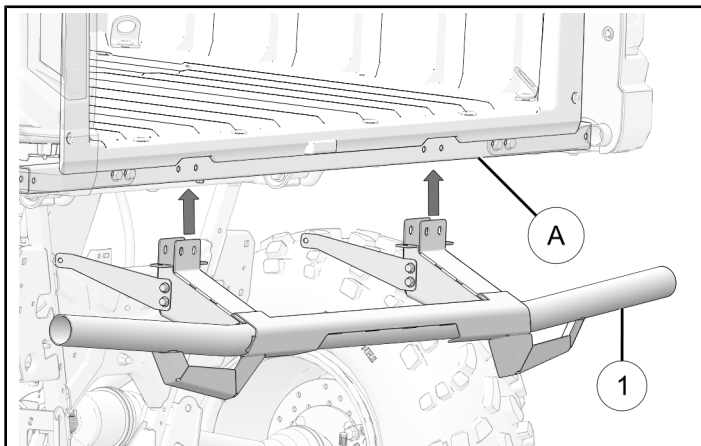


2. Loosely install rear bumper ① to chassis bar with four screws ④ and four nuts ⑤.

IMPORTANT


To prevent damage to tail light electrical harness, make sure electrical harness is moved out of the way during hardware installation.

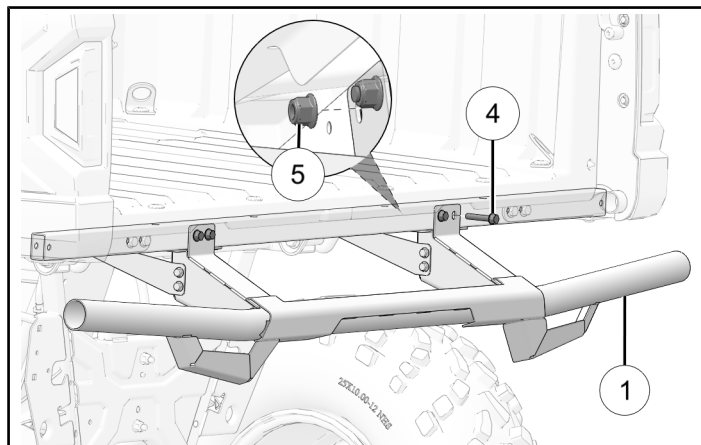


3. Loosely install bumper bracket ② to chassis with two screws ⑥ and two nuts ⑦.

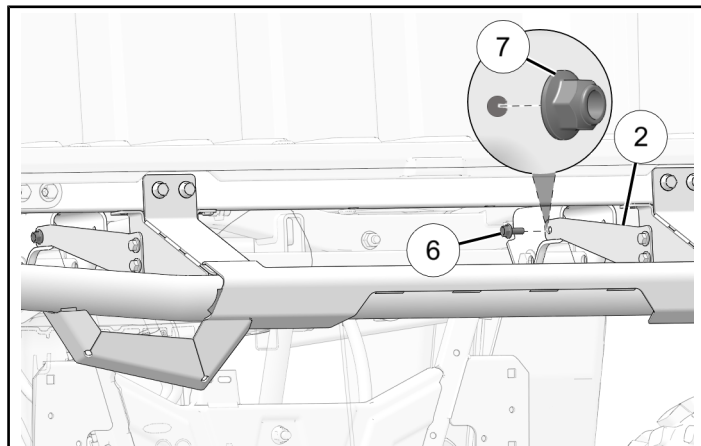

4. Loosely install four screws ③ through underside of rear bumper ① and into chassis bar ①.

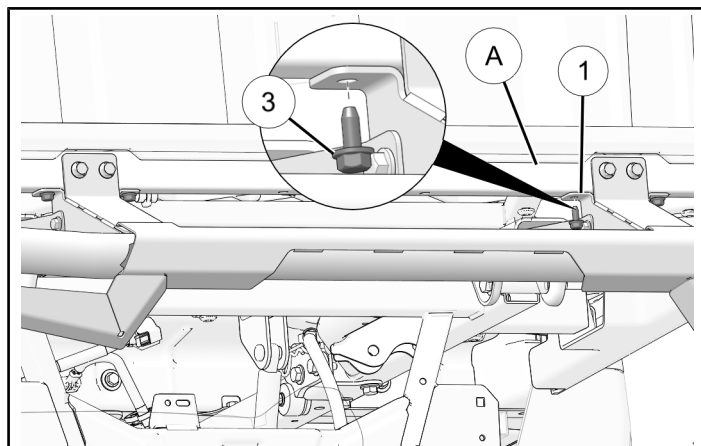

5. Install bumper caps ⑧ into each end of rear bumper.

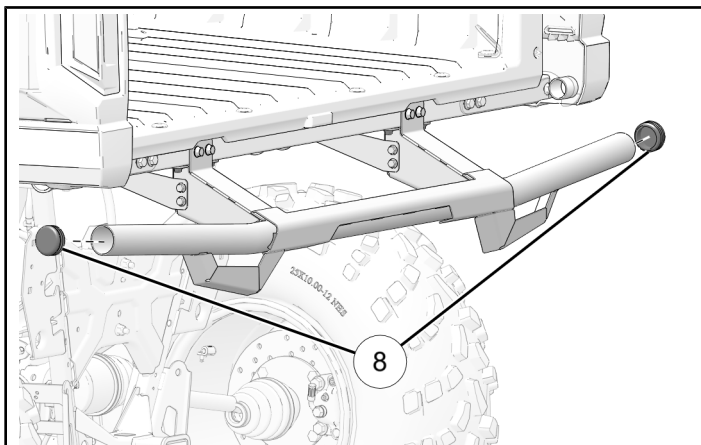

TORQUE REAR BUMPER SCREWS


IMPORTANT

Adjust rear bumper alignment as each screw is torqued, so rear bumper assembly sits correctly on vehicle.

1. Torque four screws ③ to specification.

TORQUE


Bumper Chassis Screws ③:
9 ft-lbs (12 N·m)

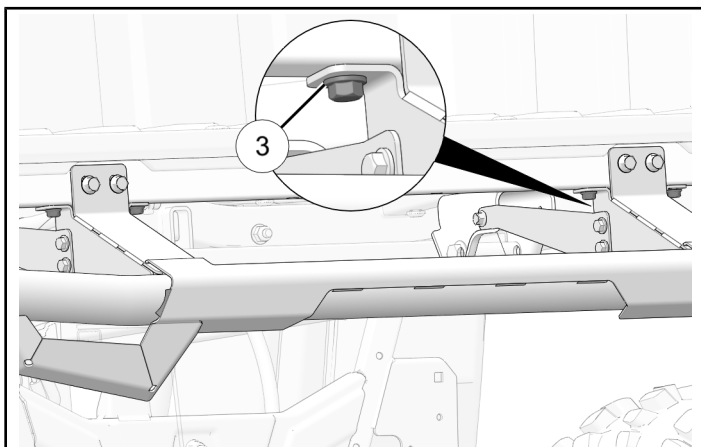

2. Counter hold nuts ⑤ and torque four screws ④ to specification.

TORQUE


Rear Bumper Screws ④:
16 ft-lbs (22 N·m)

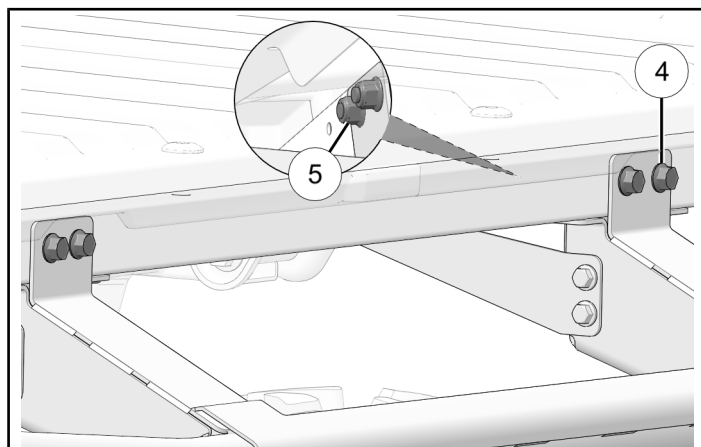

3. Torque four screws ③ to specification.

TORQUE


Bumper Bracket Screws ③:
9 ft-lbs (12 N·m)

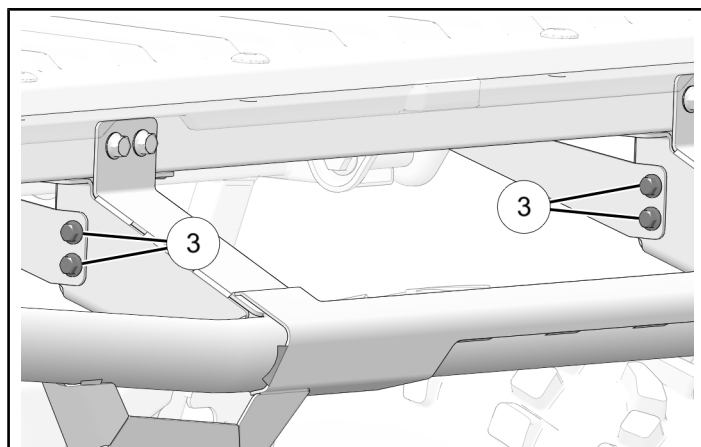


4. Counter hold nuts ⑦ and torque screws ⑥ to specification.

TORQUE

Bumper Bracket Chassis Screws ⑥:
9 ft-lbs (12 N·m)

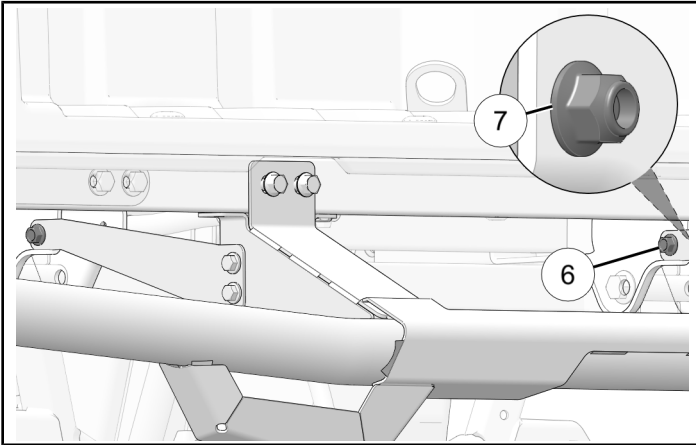

2. Attach cables to screws on cargo box.

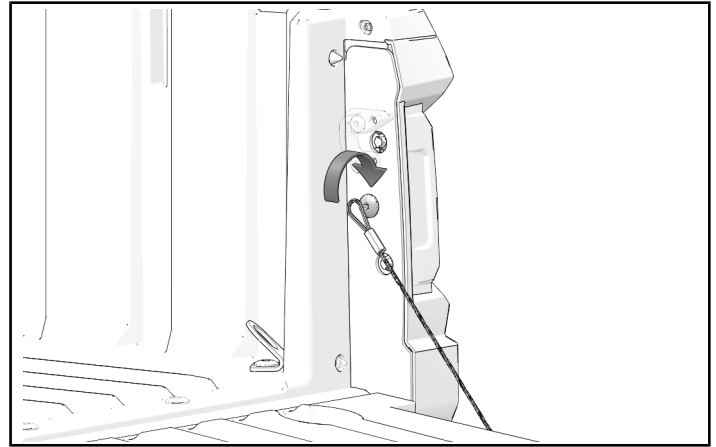


3. Close tailgate.

VEHICLE REASSEMBLY

TAILGATE INSTALLATION

1. Install tailgate into slotted pivot on cargo box and move to the right.

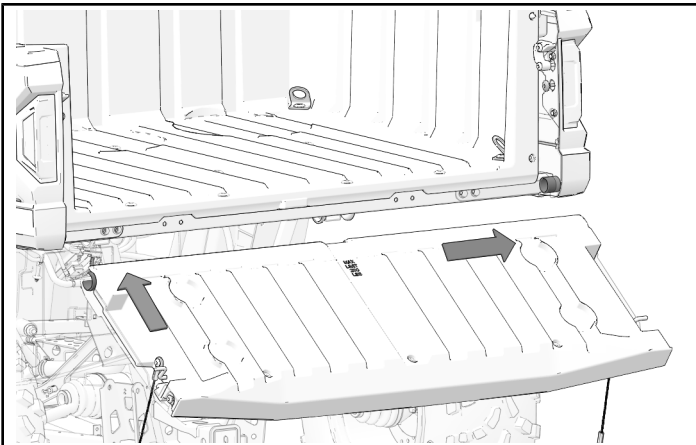

INSTRUCTION FEEDBACK FORM

A feedback form has been created for the installer to provide any comments, questions or concerns about the installation instructions. The form is viewable on mobile devices by scanning the QR code or by clicking [HERE](#) if viewing on a PC.

