




14. Attach the red and black leads of the Angle Control harness to the corresponding red and black leads on the winch contactor as shown in Figure 8 and connect the white switch plug to the harness at this time.

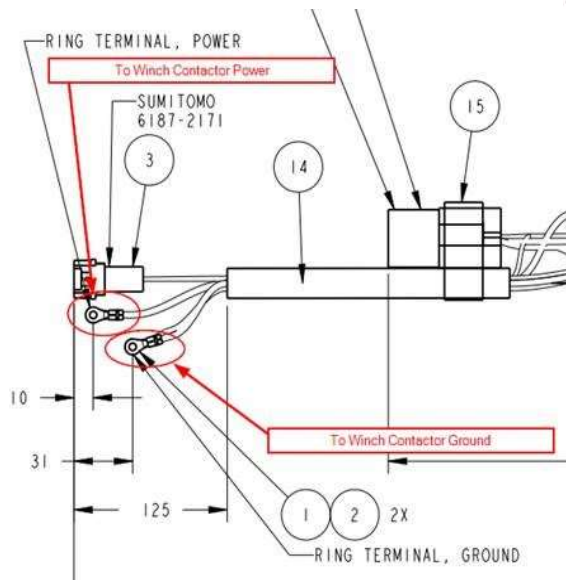